

Technical Data Sheet

PLA Pro Filament

PLA Pro is an FFF 3D printing filament, produced with a specially toughened polylactic acid modified material, which is twice as tough as ordinary PLA filaments. PLA Pro has excellent dimensional stability and very good toughness, does not warp, does not crack, and is easy to print. PLA Pro filament achieves 100% neat arrangement, no bending, no knotting, and smooth wire feeding. It is a very suitable filament for 3D printers use.

Main features:

Easy to print / dimensionally stable / high toughness / neatly winding

Main Specifications:

Physical Properties	Test Means		
Density	ISO 1183	g/cm ³	1.25~1.26
MFR(250°C/2.16Kg)	ISO 1133	g/10min	3~6
Moisture Absorption(23°C/24h)	ISO 62	%	<0.3
Mechanical Properties			
Tensile strength	ISO 527	Mpa	45.5~49
Elongation at break	ISO 527	%	14.5~16.5
Flexural Modulus	ISO 527	Mpa	950~1050
Flexural Strength	ISO178	Mpa	73~76
Impact Strength	ISO180	KJ/m ²	9.5~10.5
Thermodynamic Properties			
HDT@ 0.455 MPa(66 psi)	ISO75	°C	53
Continuous Use Temperature	IEC 60216	°C	50

Test Sample Printing Conditions:

3D Printer	Prusa XL
Nozzle Diameter	0.4mm
Nozzle Temperature	210 °C
Printing Speed	60mm/s
Layer	1.2mm
Infill	100%
Standard Printed Sample	See blew attachment

Recommended Printing Parameters:

Parameters	
Nozzle Temperature	190~220°C (210°C recommended)
Bed Temperature	Room Temperature to 60°C (40°C recommended)
Bed Materials	Prusa smooth PEI sheet
Nozzle Diameter	φ 0.4/0.6mm (φ 0.4mm recommended)
Model Cooling Fan	50~100%
Layer	0.12~0.3mm
Printing Speed	60~90mm/s (60mm/s recommended)
Idle Speed	60~120mm/s
Printing Environmental Temperature	Room Temperature to 40°C
Retraction Distance	1~2mm
Retraction Speed	30~50mm/s
Supporting Materials	Itself、PVA、BVOH

Note:

To prevent moisture absorption and contamination, the packaging of filament should be kept airtight and undamaged until they are opened for use. For the same reason, some


used filament should be resealed before storage.

PLA pro is a biodegradable material, moisture and oxygen in the air and ultraviolet rays will accelerate the aging of the material. In order not to affect the final printing quality, the PLA profilament after opening need to be used up as soon as possible.



Disclaimer:

Since conditions of use and applicable laws may vary from place to place, it is the customer's responsibility to determine the suitability of the products and product information in this document for the customer's use, and to ensure that their workplace and handling of the product comply with applicable laws and other governmental regulations. The Creation Company assumes no responsibility or liability for the information in this document, nor does it provide any warranty. All implied warranties of merchantability or fitness for a particular purpose under this document are expressly excluded.



Attachment: Test sample dimensions and printing direction

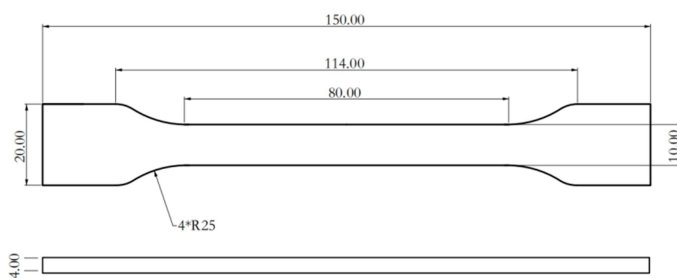

Tensile testing specimen; ASTM D638 (ISO 527, GB/T 1040)

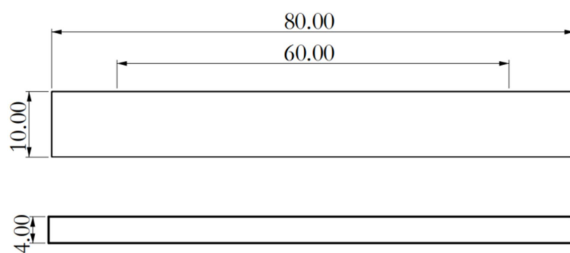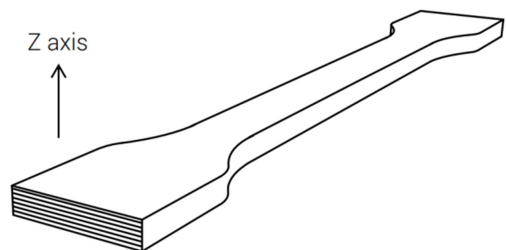

Flexural testing specimen; ASTM D790 (ISO 178, GB/T 9341)

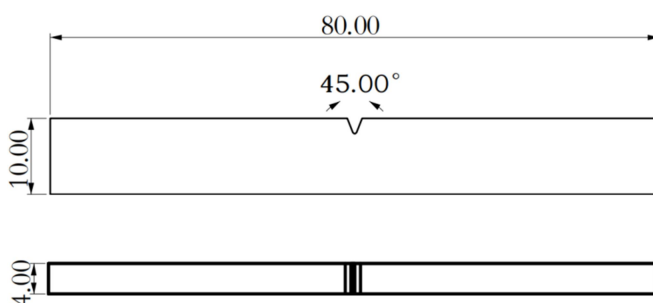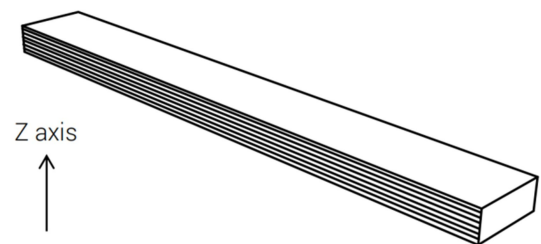

Impact testing specimen; ASTM D256 (ISO 179, GB/T 1043)

